



Fitting Instructions and Parts List

Part No.
332990

Issue 2
December 1977

BL Components Ltd.

Unipart House

Cowley, Oxford OX4 2PG

Telephone: Oxford (0865) 778966


Telex: 83331

Cables: UNIPART Oxford

TOWING AND LIFTING RINGS

Kit Part No. 332990

LAND-ROVER

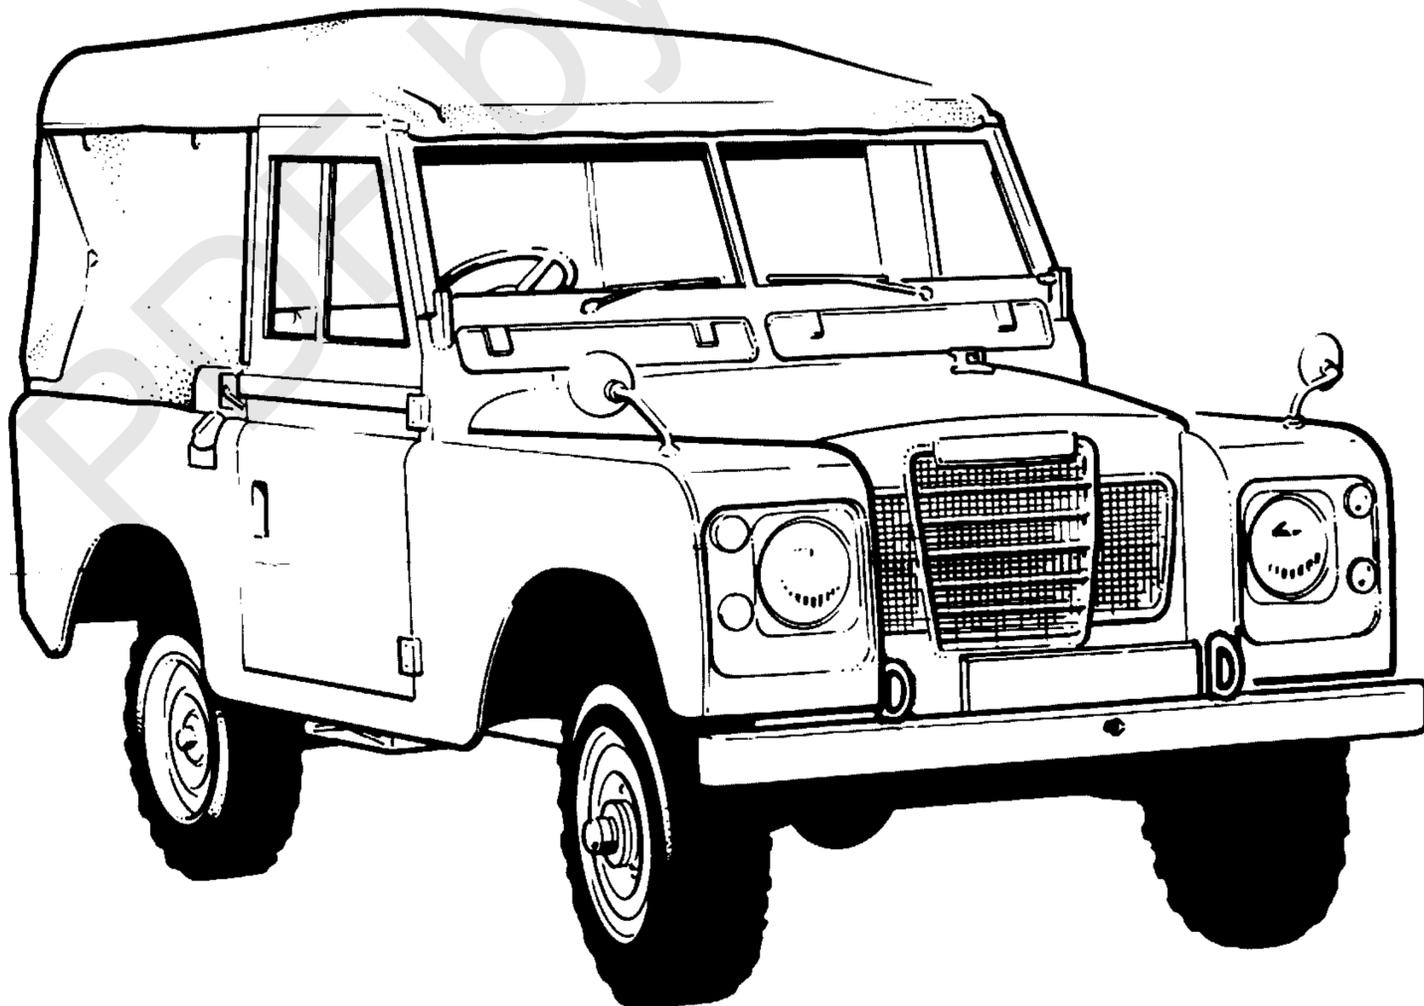


SUBJECT: Fitting Towing and Lifting Rings.

MODELS: Land-Rovers.

PARTS LIST

FRONT LIFTING AND TOWING RING ASSEMBLY		QTY.	PART No.
		1	267950
Comprises:—			
Lifting and towing ring		2	242139
Bolt ($\frac{5}{8}$ " x $1\frac{1}{2}$ " long)	} Fixing towing ring to front bumper.	4	255249
Plain washer		4	4094
Self locking nut ($\frac{5}{8}$ ")	} Fixing towing ring and bumper to chassis frame.	4	GHF 243
Bolt ($\frac{5}{8}$ " x $4\frac{1}{2}$ " long)		4	BH 606361
Plain washer		4	4094
Self-locking nut ($\frac{5}{8}$ ")		4	GHF 243

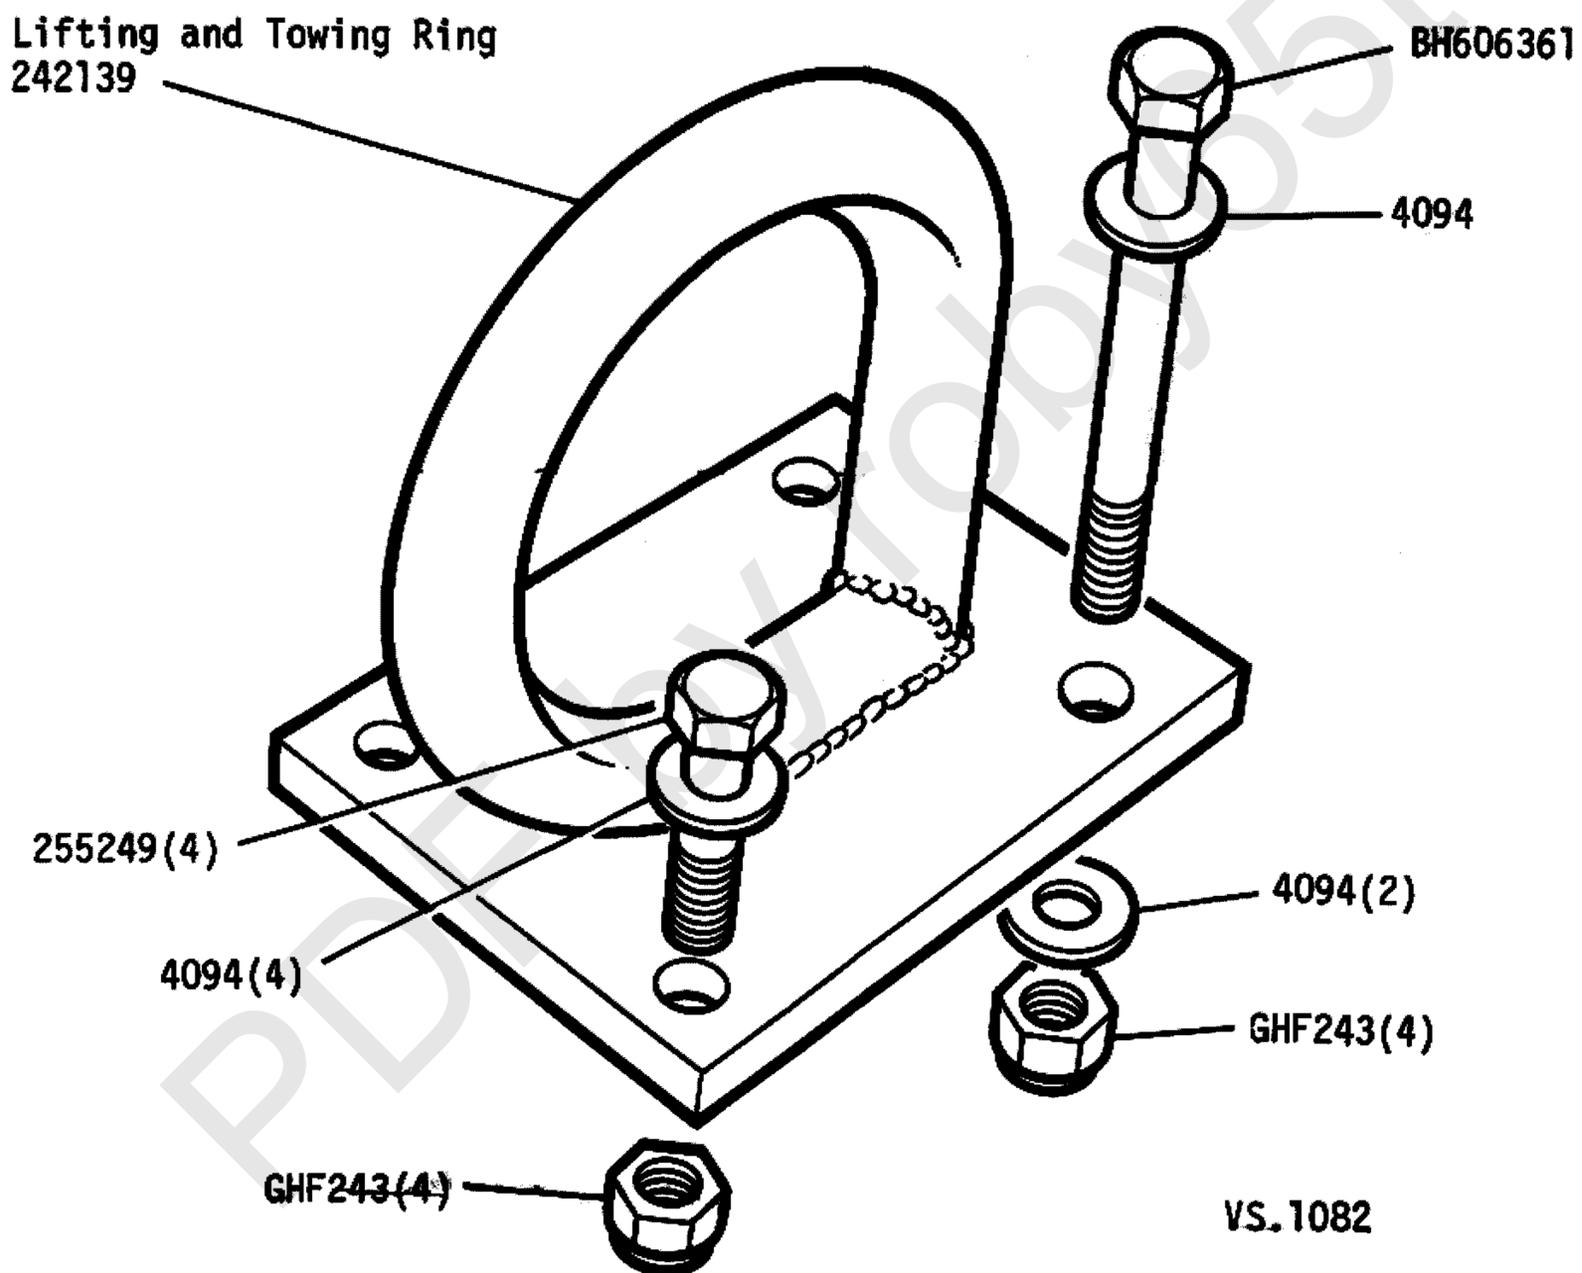

VS.1082

PROCEDURE:—

1. On Early Series II Land-Rovers it will be necessary to remove and discard the front valance.
2. Remove the front bumper securing bolts.
3. Position towing rings and secure with the four long bolts supplied.
4. Using $\frac{25}{64}$ " drill, drill four holes through the bumper using the towing rings as a template and secure with the remaining bolts supplied.